

# Données massives et apprentissage profond

## Lecture 1 – Apache Spark

**Gianluca Quercini**

gianluca.quercini@centralesuplec.fr

Polytech Paris-Saclay, 2022



### Class material

Available online  
<https://tinyurl.com/p7jb5wra>

[Click here](#)

- Slides of the lectures.
- Tutorials and lab assignments.
- References (books and articles).

### Organization of the course

- MapReduce and Spark.
- Spark programming.
- SQL and NoSQL.
- MongoDB practice.
- Hadoop technologies.
- Scaling.

### Evaluation

- **Lab assignments.** Lab assignments 1 and 2 will be graded.
  - Lab assignment 1. Spark programming
  - Lab assignment 2. MongoDB
  - **Submission:** Code source + written report.
- **Written exam.** 1 hour.
  - Spark programming.
  - Data modeling in MongoDB.
  - Querying in MongoDB.

## Contact

Email: [gianluca.quercini@centralesupelec.fr](mailto:gianluca.quercini@centralesupelec.fr)

Email: [stephane.vialle@centralesupelec.fr](mailto:stephane.vialle@centralesupelec.fr)

## Apache Spark

### Definition (Apache Spark)

**Apache Spark** is a *distributed computing framework* designed to be *fast* and *general-purpose*. [Source](#)

### Main features


- **Speed.** Run computations in **memory** (Hadoop relies on disks).
- **General-purpose.** Different workloads in the same system.
  - Batch applications, iterative algorithms.
  - Interactive queries, streaming applications.
- **Accessibility.** Python, Scala, Java, SQL and R; rich built-in libraries.
- **Integration.** With other Big Data tools, such as **Hadoop**.

## What you will learn

In this lecture you will learn:

- What **Spark** is and its main features.
- The components of the **Spark stack**.
- The high-level **Spark architecture**.
- The notion of **Resilient Distributed Dataset** (RDD).
- The main **transformations** and **actions** on RDDs.

## Spark components

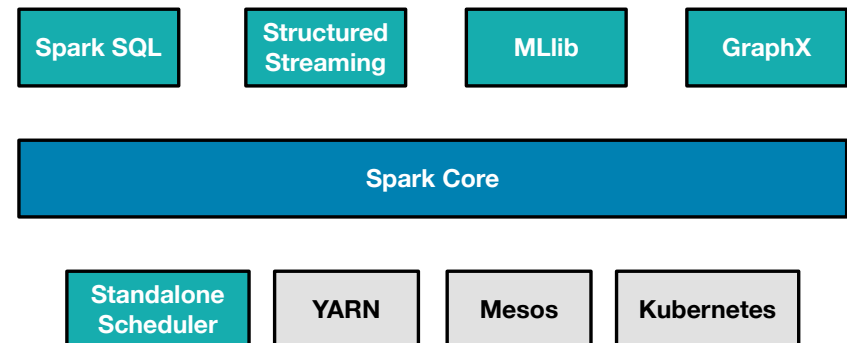

[Image source](#)

## Spark components

### Spark core

- **Scheduling, distributing, and monitoring** applications.
- Data structures for manipulating data (RDDs, DataFrames).

### Spark SQL

- Spark's package for working with **(semi-)structured data**.
- Data querying with **SQL** and **HQL** (Hive Query Language).
- Many sources of data: JSON, XML, Parquet...

## Spark components

### GraphX

- Manipulation of **graph data**.
- Library with common graph algorithms (e.g., PageRank)

### Cluster managers

- Control how tasks are distributed across a cluster.
- Spark provides its own **standalone** cluster manager.
- Spark can also use other cluster managers.

## Spark components

### Structured streaming

- Processing of live **streams** of data (e.g., real-time event logs)
- Similar API to batch processing.

### MLlib

- **Machine learning** algorithms (e.g., classification, regression, clustering)
- All methods designed to scale out across a cluster.

## Spark unified stack: benefits

- **Shallow learning curve.** Same **programming model** across all components.
- **Optimization propagation.** Higher-level components automatically benefit from improvements on lower-layer components.
- **Cost minimization.** No need for further software components.
- **Heterogeneous processing models** in the same application.
  - Read a stream of data.
  - Apply machine learning algorithms.
  - Uses SQL to analyze the results.

## Using Spark

### Interactive mode

Using a command-line interface (CLI) or **shell**.

- Python and Scala shell.
- SparkSQL shell.
- SparkR shell.


### Data processing applications

Building an **application** by using the **Spark APIs**.

- Scala (Spark's native language).
- Python.
- Java.

## Spark application

- Spark application: set of independent processes called **executors**.
- Executors run computations and store the data for the application.
- Executors are coordinated by the **driver**.

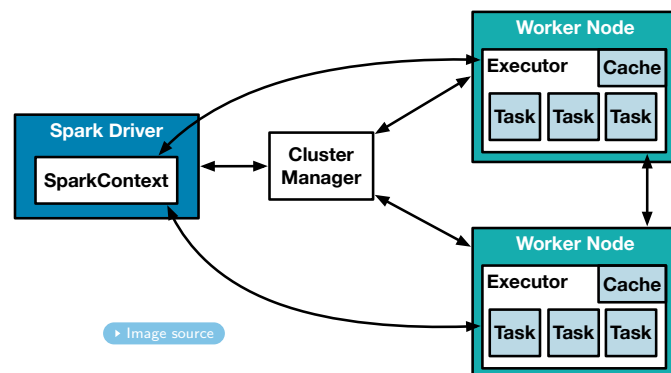

► Image source

## Who uses Spark


Several important actors use Spark:

- **Amazon**.
- **eBay**. Log transaction aggregation and analytics.
- **Groupon**.
- **Stanford DAWN**. Research project aiming at democratizing AI.
- **TripAdvisor**.
- **Yahoo!**

Full list available at <http://spark.apache.org/powered-by.html>

## Spark application execution

- The **driver** is launched and creates the **SparkContext** object.
- The **SparkContext** obtains **executors** from the **cluster manager**.
- The driver sends the **user's code** to the executors.
- The driver assigns each executor a set of **tasks**.
- A **task** is a computation on a **chunk of data**.

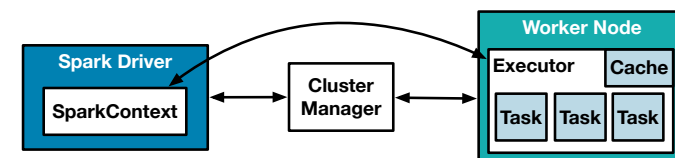

## Spark application execution

- Applications are **isolated** from one another.
  - Each application has its own SparkContext.
  - An executor only runs tasks of one application.
  - A driver only schedules tasks for one application.
  - Data cannot be shared across different applications.
- Spark is **agnostic** to the underlying cluster manager.
- The driver listens to incoming connections from the executors on a network port.
- The driver should be in the same local network as the executors.

👉 Two different Spark applications can still share data through an external storage system (e.g., a database or HDFS files).

## Low-level Spark programming

- A Spark program uses an object called **SparkContext**.
- **SparkContext** represents a connection to a cluster.

### Initializing the SparkContext

```
from pyspark import SparkConf, SparkContext

conf = SparkConf().setMaster(<<cluster URL>>).setAppName(<<app_name>>)
sc = SparkContext(conf = conf)
```

- A Spark program is a sequence of operations invoked on the **SparkContext (sc)**.
- These operations manipulate a special type of data structure, called **Resilient Distributed Dataset (RDD)**.

## Spark programming

Two options exist to write a Spark application:

- **Low-level** programming, using operations on a low-level data structure called **Resilient Distributed Dataset (RDD)**.
- **High-level** programming, using high-level libraries, such as SparkSQL and Structured Streaming.

👉 In this lecture, we'll focus on low-level programming to better understand the inner workings of Spark.

## Resilient Distributed Dataset (RDD)

### Definition (Resilient Distributed Dataset)

A **Resilient Distributed Dataset**, or simply **RDD**, is an **immutable**, **distributed** collection of objects. [Source](#)

- The data in each RDD is split across multiple **partitions**.
- Each partition resides on one node of the cluster.
- Two partitions can reside on the same node.

## Resilient Distributed Dataset (RDD)



## Creating an RDD

- From an **in-memory collection** (e.g., a list or a set).

```
sc.parallelize([1, 5, 3, 2, 6, 7])
```


👉 This method is used for **debugging** and **prototyping** on **small datasets**.

- From an **data source on disk** (e.g., a file or a database).

```
sc.textFile("hdfs://sar01:9000/data/sample_text.txt")
```

👉 This method is used **in production** to process **large datasets**.

## Resilient Distributed Dataset (RDD)

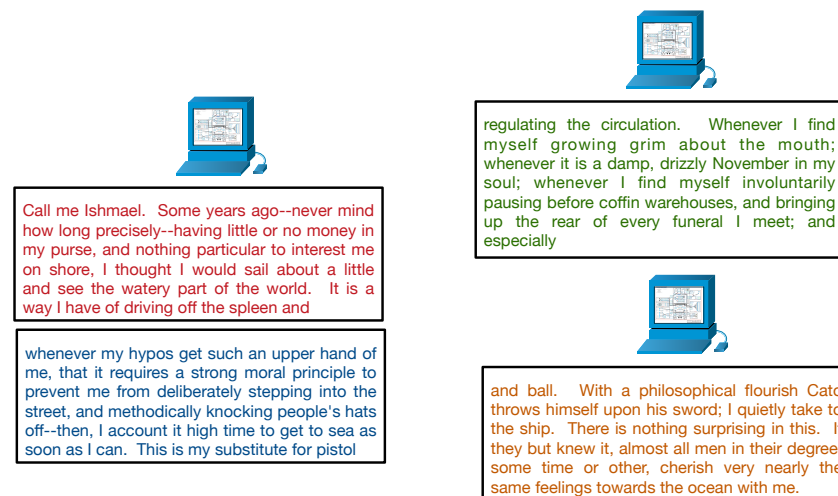

## About the number of partitions

## RDDs created with parallelize


- Local mode:** number of cores on the local machines.
- Cluster mode:** total **number of cores** on all executor nodes, or 2, whichever is larger.

## RDDs created from files stored in HDFS

- Number of HDFS blocks in the input file, or 2, whichever is larger.


## RDD transformations

A **transformation** is an operation that takes in one or more RDDs and returns a **new RDD**. A transformation is applied **in parallel** on each partition.

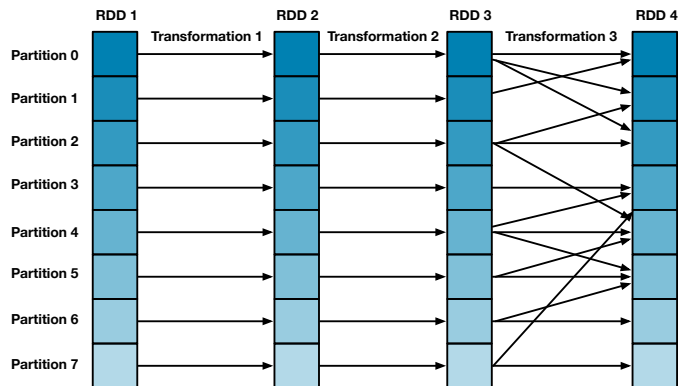

## RDD transformations: map

`map()` takes in a **function**  $f$  and a RDD  $\langle x_i \mid 0 \leq i \leq n \rangle$ ; returns a **new RDD**  $\langle f(x_i) \mid 0 \leq i \leq n \rangle$ .

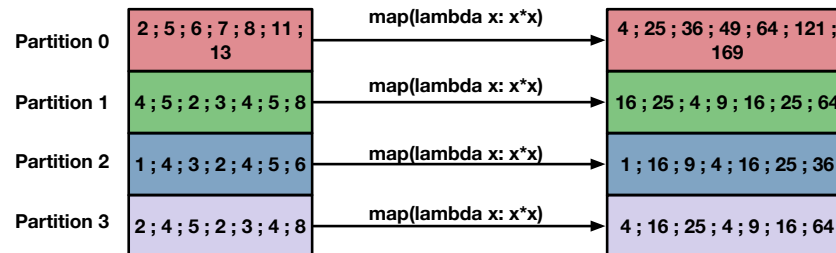


Partition  $i$  of the input RDD is on the same node as partition  $i$  of the output RDD.

## RDD transformations: flatMap

`flatMap` is used instead of `map` when the function  $f$  returns a list and we need the results to be flattened.


`flatMap(lambda x: x.split())`

`map(lambda x: x.split())`

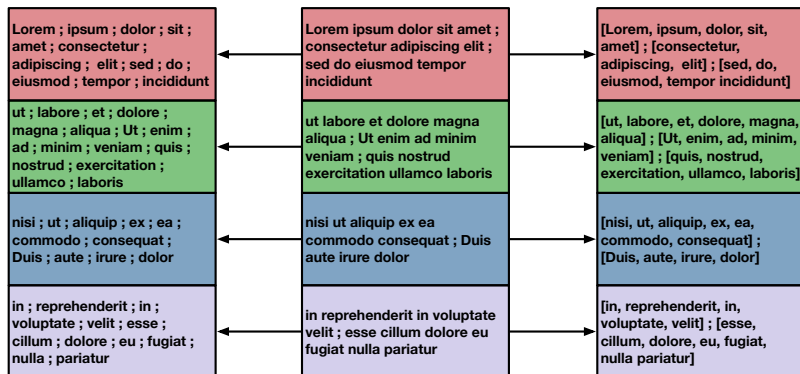


## RDD transformations: filter

`filter()` takes in a **predicate**  $p$  and a RDD  $\langle x_i \mid 0 \leq i \leq n \rangle$ ; returns a **new RDD**  $\langle x_i \mid 0 \leq i \leq n, p(x_i) \text{ is true} \rangle$

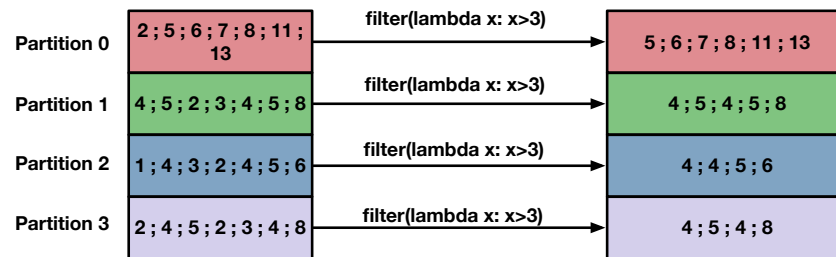


## RDD transformations: union

`union()` takes in two RDDs and returns a **new RDD** containing the items of the first and second RDD **with repetitions**.

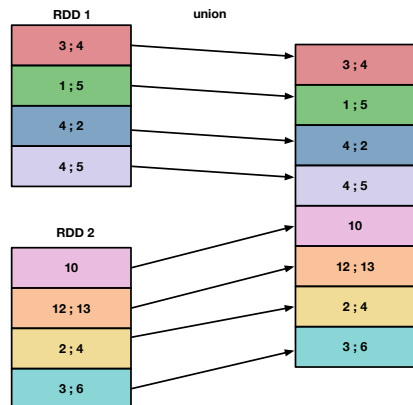

## RDD transformations: distinct


`distinct()` takes in one RDD and returns a **new RDD** containing the items of the input RDD **without repetitions**.

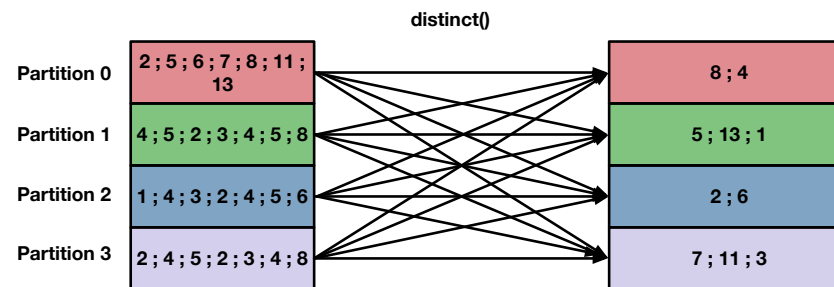

Unlike the previous transformations, `distinct` leads to data being **shuffled**.

## About data shuffling ★

Which partition does the element 23 belong to in the RDD obtained after applying the transformation `distinct`?

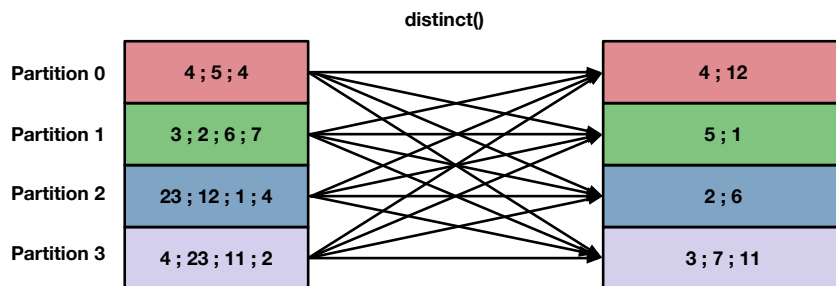

## About data shuffling ★

The element 23 belongs to the **partition 3**.


While shuffling, the **destination partition**  $p$  of an element  $K$  in a RDD with  $n$  partitions is computed as follows:

$$p = \text{hashCode}(K) \bmod n$$



## RDD transformations: intersection

`intersection()` takes in one or two RDDs and returns a **new RDD** containing the items that occur in both RDDs.

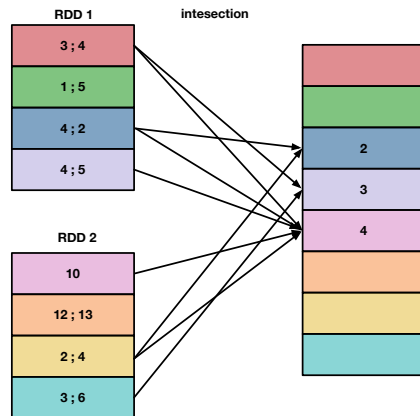

## Narrow transformations ★

### Definition (Narrow transformation)

A **narrow transformation** is one where each partition of the output RDD depends on at most one partition of the input RDD.

Which of the above transformations are narrow?

- Narrow transformations are **inexpensive**.
- No need for **communication** between executors.

## Narrow transformations ★

### Definition (Narrow transformation)

A **narrow transformation** is one where each partition of the output RDD depends on at most one partition of the input RDD.

`filter`, `map`, `flatMap` and `union` are narrow transformations.

- Narrow transformations are **inexpensive**.
- No need for **communication** between executors.

## Wide transformations ★

### Definition (Wide transformation)

A **wide transformation** is one where each partition of the output RDD may depend on several partitions of the input RDD.

Which of the above transformations are wide?

- Wide transformations are more **costly**.
- Executors need to communicate.
- Data is **shuffled** across the cluster network.

## Wide transformations ★

## Definition (Wide transformation)


A **wide transformation** is one where each partition of the output RDD may depend on several partitions of the input RDD.

`distinct` and `intersection` are wide transformations.

- Wide transformations are more **costly**.
- Executors need to communicate.
- Data is **shuffled** across the cluster network.

RDD actions: `reduce`

`reduce()` takes in an RDD and a function  $f$  and applies the function pair-wise to all elements of the input RDD.

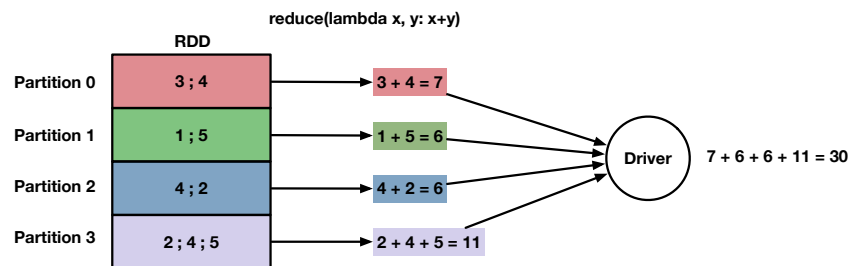

- The function  $f$  **must** take in **2 arguments**.
- The type of the value returned by the function  $f$  **must be the same** as the type of the elements of the input RDD.


## RDD actions

An **action** is an operation that takes in a RDD and returns a value to the **driver** after running a computation of the dataset.

- The result of an action is sent to the driver.
- If the result is a list of values, **all values** are sent to the driver.
- The result of an action can also be **written to disk**.
- Disk writes can be to the **local file system** or **HDFS**.

RDD actions: `collect`

`collect()` takes in an RDD and returns the **list** of the elements in the RDD.

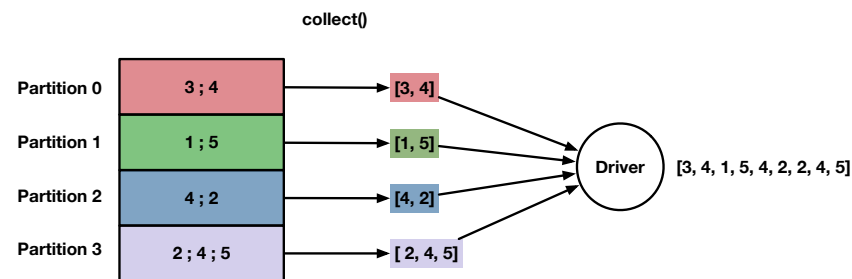


Is `collect()` a safe action? ★

What are the risks, if any, while invoking `collect()` on a large RDD?

RDD actions: `count`

`count()` takes in an RDD and returns the number of items in the RDD.

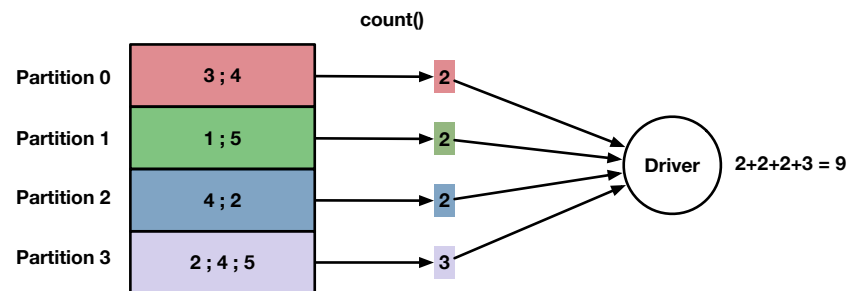

Is `collect()` a safe action? ★

What are the risks, if any, while invoking `collect()` on a large RDD?

- High network traffic.
- The driver's memory may not enough to store all the RDD elements.

Understanding the code ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
    "chemistry", "biology", "astronomy"])
r2 = r1.map(lambda x: x.capitalize())
```

## Understanding the code ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
"chemistry", "biology", "astronomy"])
r2 = r1.map(lambda x: x.capitalize())
```

- r2 is an RDD (result of a transformation).
- r2 has as many elements as r1.
- Each item of r2 is a string from r1 with the first letter capitalized.

## What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
"chemistry", "biology", "astronomy"])
r2 = r1.filter(lambda x: len(x) > 10)
```

- r2 is an RDD (result of a transformation).
- r2 has less elements than r1.
- r2 only contains the items from r1 that have more than 10 characters.

## What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
"chemistry", "biology", "astronomy"])
r2 = r1.filter(lambda x: len(x) > 10)
```

## What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
"chemistry", "biology", "astronomy"])
r2 = r1.reduce(lambda x, y: "{} - {}".format(x, y))
```

What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
    "chemistry", "biology", "astronomy"])
r2 = r1.reduce(lambda x, y: "{} - {}".format(x, y))
```

- r2 is a string, **not a RDD** (result of an action).
- r2 is the string "computer science - geology - chemistry - biology - astronomy".

What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
    "chemistry", "biology", "astronomy"])
r2 = r1.reduce(lambda x, y: [x + y])
```

The code is incorrect, because the return type (list) of the reduce function is different from the type of the input RDD elements (string).

What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["computer science", "geology", \
    "chemistry", "biology", "astronomy"])
r2 = r1.reduce(lambda x, y: [x + y])
```

What does the following code? ★

What does the following code?

```
r1 = sc.parallelize(["author", "title", "edition"])
r2 = r1.flatMap(lambda x: [c for c in x])
```

## What does the following code? ★


What does the following code?

```
r1 = sc.parallelize(["author", "title", "edition"])
r2 = r1.flatMap(lambda x: [c for c in x])
```

- `r2` is an RDD (result of a transformation).
- Each element of `r2` is a letter from a string in `r1`. How would that be different if we had used `map` instead of `flatMap`?

Key-value RDDs transformations: `reduceByKey`

`reduceByKey` takes in a RDD with  $(K, V)$  pairs and a function  $f$  and returns a **new RDD** of  $(K, V)$  pairs where the values for each key are aggregated using  $f$ , which must be of type  $(V, V) \rightarrow V$ .

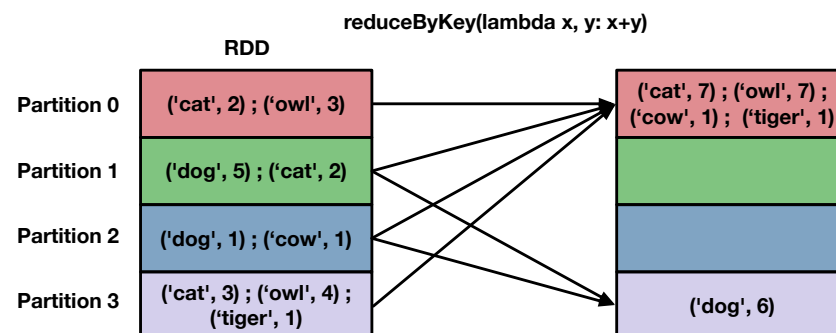

## Key-value RDDs

**Key-value RDDs** (a.k.a., **Pair RDDs**) are RDDs where each item is a pair  $(k, v)$ ,  $k$  being the key and  $v$  being the value.

- Key-value RDDs are important building blocks in many applications.
- Key-value RDDs support all the transformations and actions that can be applied on regular RDDs.
- Key-value RDDs support special transformations and actions.


Key-value RDDs transformations: `reduceByKey`

- The input RDD has a certain number of partitions  $n$ .
- No assumption can be made on which elements belong to which partition.
- The RDD returned by `reduceByKey` is **hash partitioned**. Each item belongs to a precise partition.
- The partition number  $p$  of a pair  $(K, V)$  is derived as follows:

$$p = \text{hashCode}(K) \bmod \text{num\_partitions}$$


## Key-value RDDs transformations: `groupByKey`

`groupByKey` takes in a RDD with  $(K, V)$  pairs and returns a **new RDD** of  $(K, \text{Iterable} < V >)$  pairs.

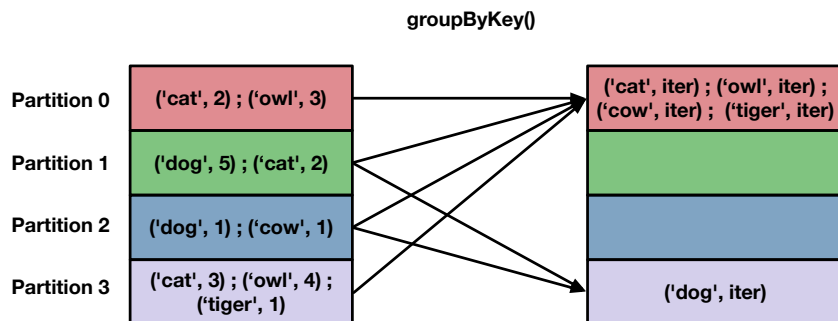

## Key-value RDDs transformations: `mapValues`

`mapValues` takes in a RDD with  $(K, V)$  pairs and a function  $f$  and returns a **new RDD** where the function  $f$  is applied to each value  $V$  (keys are not modified).

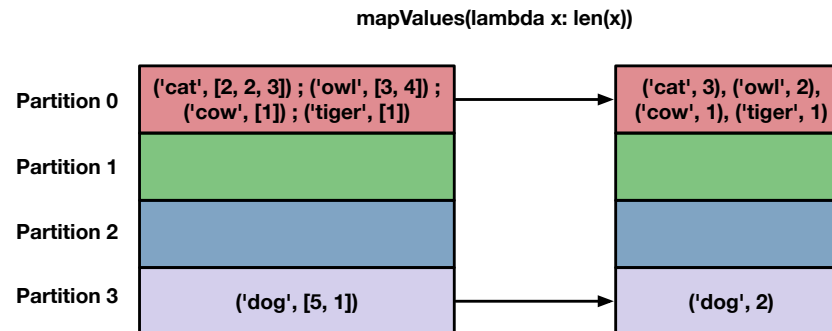


## Example: Word count

```
def word_count(input_file):
    text = sc.textFile(input_file)
    return text.flatMap(lambda line: line.split(" "))\
        .map(lambda word: (word, 1))\
        .reduceByKey(lambda x, y: x+y)
```

- The function `textFile` reads a text file into a RDD.
- Two narrow transformations (`flatMap` and `map`) and one wide transformation (`reduceByKey`).


👉 Spark maintains a **logical execution plan** (called **RDD lineage**) described as a **Directed Acyclic Graph (DAG)**.

## RDD lineage

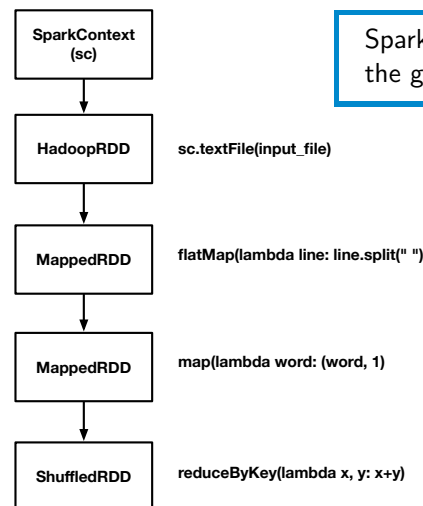


Spark has a **DAG scheduler** that splits the graph into multiple **stages**.


## RDD lineage: stages

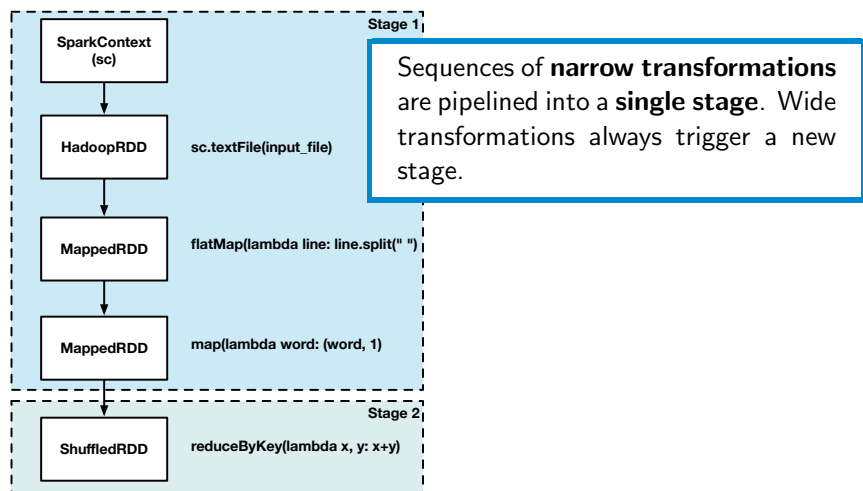


## RDD lineage: stages

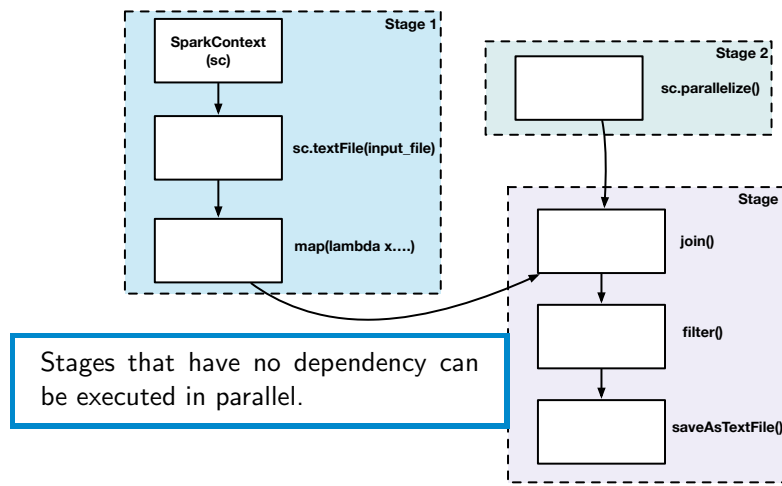

## RDD lineage: tasks

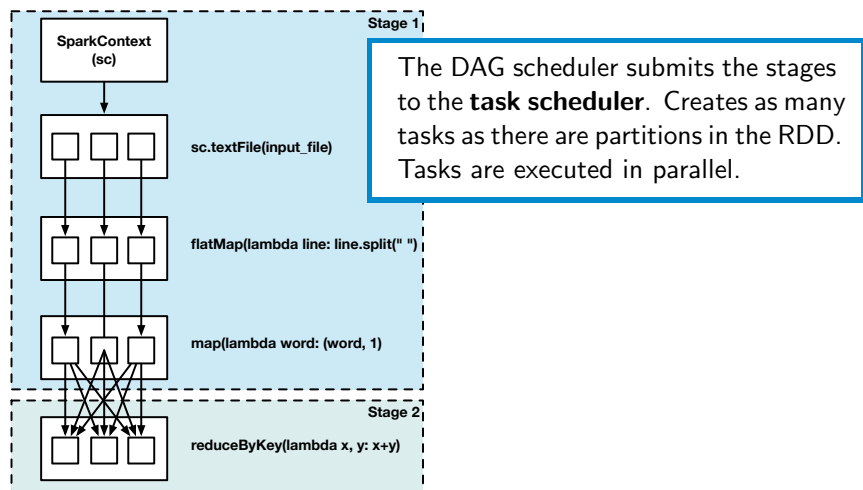


## RDD lineage: fault tolerance

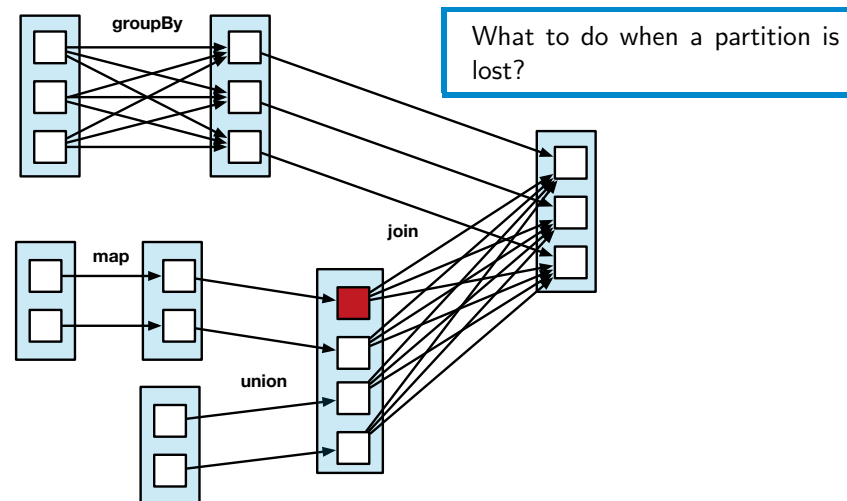



## RDD lineage: fault tolerance

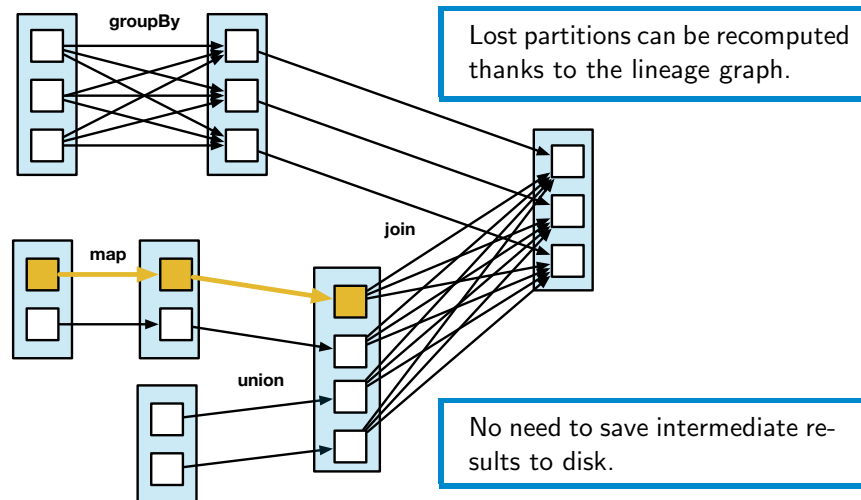

## Lazy evaluation: motivating example ★

```
lines = sc.textFile("./data/logfile.txt")
exceptions = lines.filter(lambda line : "exception" in line)
nb_lines = exceptions.count()
print("Number of exception lines ", nb_lines)
```

What happens if Spark executes **immediately** each transformation?

## Lazy evaluation

- In Spark, transformations are **lazily evaluated**.

### Definition (Lazy evaluation)

When a transformation is invoked, Spark **does not execute it** immediately. Transformations are only executed when **the first action** is called.

- An RDD can be thought of a set of *instructions* on how to compute the data that we build up through transformations.
- Lazy evaluation helps **reducing the number of passes** needed to load and transform the data.

## Lazy evaluation: motivating example ★

- Invoking `sc.textFile()` does not load immediately the data.
- The transformation `filter()` is not applied when it is invoked.
- Transformations are applied only when the action `count()` is invoked.
- **Only the data** that meet the constraint of the `filter` is loaded from the file.

```
lines = sc.textFile("./data/logfile.txt")
exceptions = lines.filter(lambda line : "exception" in line)
nb_lines = exceptions.count()
print("Number of exception lines ", nb_lines)
```

👉 **Without lazy evaluation** we would have loaded into main memory **the whole content** of the input file.

## Lazy evaluation: consequences ★

- The following code invokes **two actions**: which ones?
- What happens when we invoke the **second action**?

### Example

```
lines = sc.textFile("./data/logfile.txt")
exceptions = lines.filter(lambda line : "exception" in line)
nb_lines = exceptions.count()
exceptions.collect()
```

## Persisting the data

- Persisting the data means **caching** the result of the transformations.
  - Either in main memory (default), or disk or both.
- If a node in the cluster fails, Spark **recomputes** the persisted partitions.
  - We can **replicate** persisted partitions on other nodes to recover from failures without recomputing.

```
lines = sc.textFile("./data/logfile.txt")
exceptions = lines.filter(lambda line : "exception" in line)
exceptions.persist(StorageLevel.MEMORY_AND_DISK)
nb_lines = exceptions.count()
exceptions.collect()
```

- `persist()` is called right before the first action.
- `persist()` does not force the evaluation of transformations.
- `unpersist()` can be called to evict persisted partitions.

## Lazy evaluation: consequences ★

- With lazy evaluation, transformations are computed **each time** an action is invoked on a given RDD.
- In the following example, all transformations are computed when we invoke the function `count()` **and** the function `collect()`.

### Example

```
lines = sc.textFile("./data/logfile.txt")
exceptions = lines.filter(lambda line : "exception" in line)
nb_lines = exceptions.count()
exceptions.collect()
```

To avoid computing transformations multiple times, we can **persist** the data.

## References

- Karau, Holden, et al. *Learning spark: lightning-fast big data analysis*. O'Reilly Media, Inc., 2015. [Click here](#)

## Playing with transformations and actions

Notebook available on Google Colab [▶ Click here](#)

👉 Select File → Save a copy in Drive to create a copy of the notebook in your Drive and play with it.